

CTA *DUMP* CART

6500


**HIGH TRANSPORT AND
ELEVATION CAPACITIES**

**GREATER GRAIN TANK
CAPACITY FOR PEANUTS**

ADJUSTABLE AXLE



During the harvest, the work of the dump cart is fundamental for the unloading agility of the harvesters.

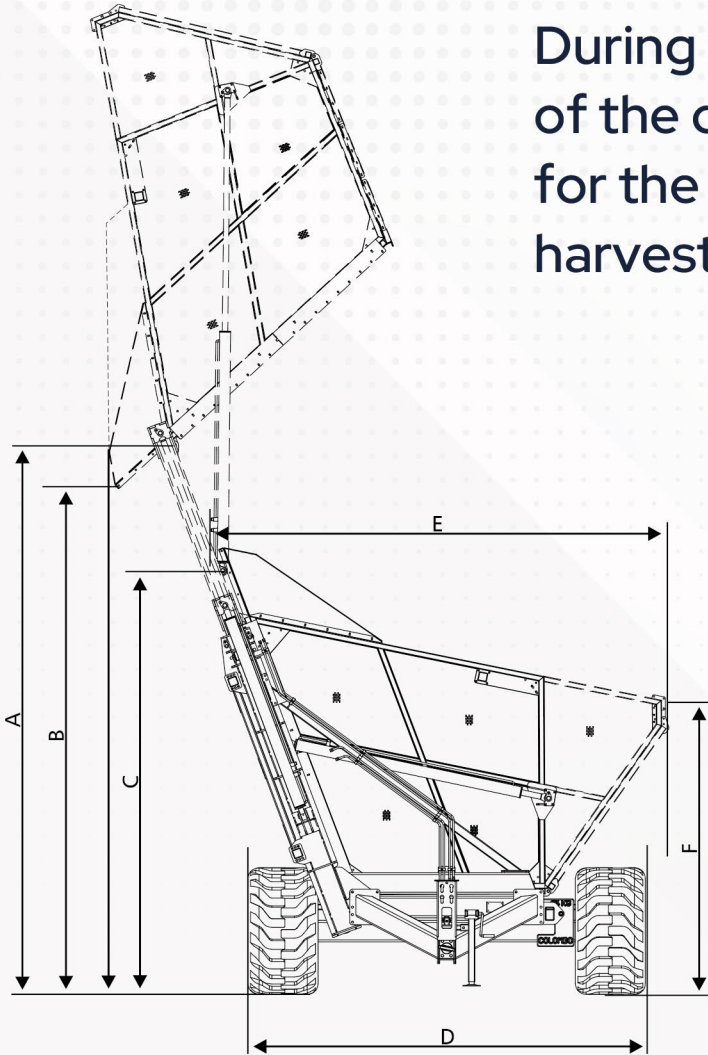

Retractable side wall for transport.



Excellent removal of foreign material through perforated side walls and floor.

CTA 6500 - TECHNICAL SPECIFICATIONS

Engine Power Required	100 CV
Coupling	Drawbar
Remote control valves required	2

DIMENSIONS

(A) Max. Discharge Height	205 in (5,200 mm)
(B) Discharge Height	181 in (4,600 mm)
(C) Transport Height	161 in (4,100 mm)
(E) Transport Width	122 in (3,100 mm)
(F) Loading Height	107 in (2,710 mm)
Length	255 in (6,480 mm)
Grain Tank Length	144 in (3,660 mm)
Maximum Load Capacity	750ft ³ (21,237 l)

WHEELS

Tire Measurements	23.1x26
(D) Adjustable Wheelbase (outside)	2,820 - 3,020 - 3,220 mm
Weight	6,170 lbs (2,800 kg)

Product improvement is one of COLOMBO priorities. COLOMBO reserves the right to introduce changes in product components and accessories without previous notice.

Marketing - 171.175-1 - Rev. 4 - 09/22